


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 32 TOWNSHIP 15 RANGE 5
DATE: 11-19-07
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison (broken)
METHOD OF ESTABLISHMENT: County: 8-26-00
IN. S.P.C. E ZONE NAD '83
NAME: 15053201
N: 495471.9078(m)
E: 70714.8454(m)

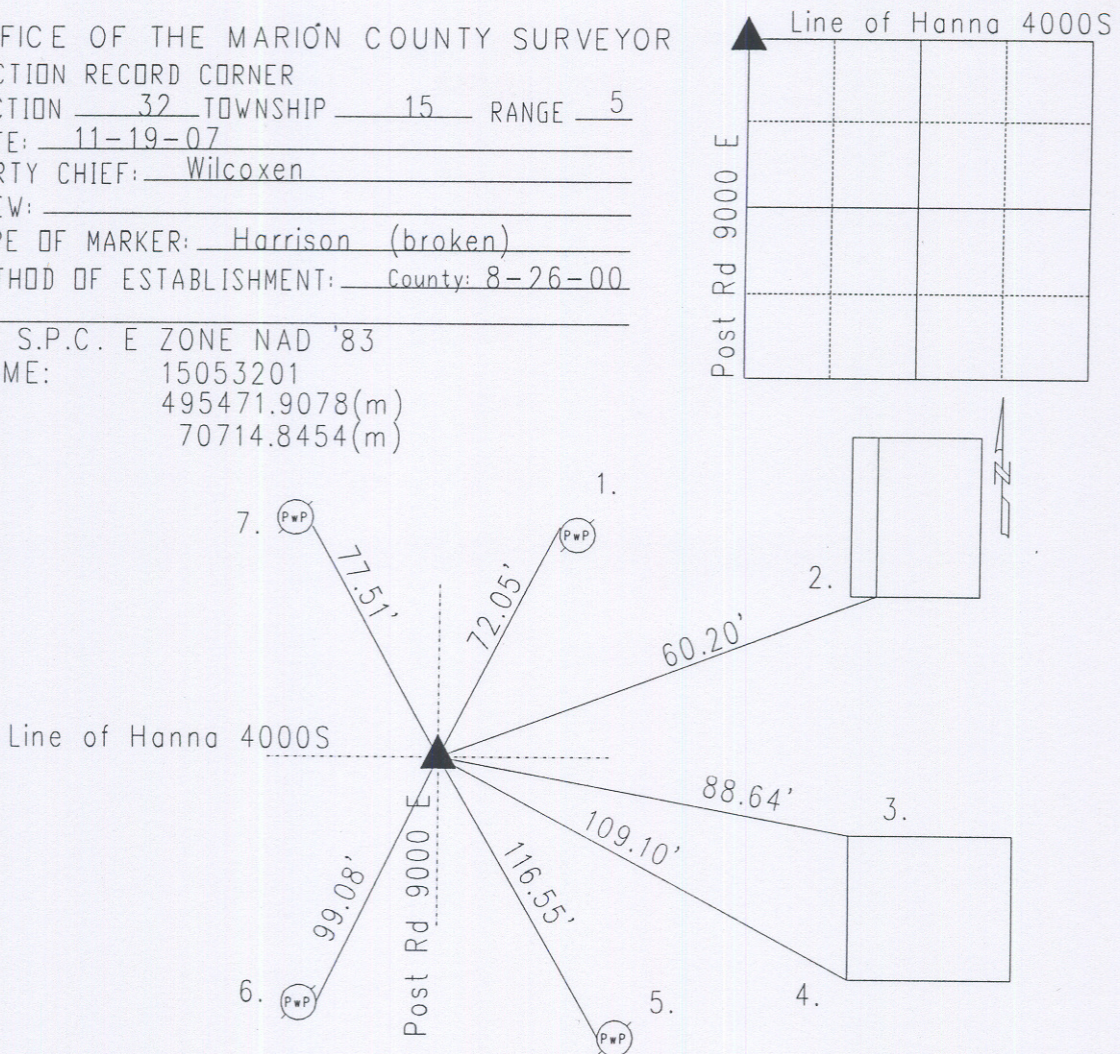

Original post set 1820 by Hendricks with witness: 30" beech N 17 W 21 links; 18" dogwood S 14 E 17 links per Marion County Atlas pg. 14. Hosbrook 4-5 & 6-7-1853 called no monument nor rocks set, but, witness follows: 28" oak S 87 1/2 W 20 links, 36" white oak S 35 1/2 E 71 links per Franklin Township Legal Survey Book pg.11. Baden 8-8-55 called stone 1' down w/red brick over it. Hankins 6-23-58 called a road nail w/brass washer. Fortner 2-18-75 called a PK nail. Cleveland 4-29-80 called a PK nail. Martin (Pace Engineering) 1-31-86 called a PK nail. Wilcoxen excavated 6-23-93 and found PK nail at surface. Large road nail w/brass washer found 3" down. 1/2" guard pipe found beside small stone. 12"x10"x6" found 12"down. Under small stone fd. Large stone fd. Harrison set. Re-tied 8-26-00 & 11-19-07 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	72.05'	Road nail W PwP#58-681 AB 12"up
2.	60.20'	SF corner of porch for ADDRESS 3949
3.	88.64'	NW corner of ADDRESS 4009
4.	109.10'	SW corner "
5.	116.55'	PK nail W PwP#57-681 AB 12"up
6.	99.08'	Mag nail w/bw F PwP #195-681 B 12"up
7.	77.51'	Mag nail w/bw F PwP#26-681 A 18"up